PCAP Multi Touch Monitor

Enclosed Chassis Type

□ Specification

Model Name	TSCHA-W1561-PCT
Size	15.6 inch Wide
Active Area(mm)	344.16(H) x 193.59(V)
Pixel Pitch(mm)	0.17925(H) x 0.17925(V)
Resolution	1920(H) x 1080(V)
Contrast Ratio	800 : 1 (Typ)
Display Color	262K
Response time (R + F)	25 ms (typ)
Brightness(cd/m²)	Typ. 400
Viewing Angle (L/R/U/D)	89/89/89
Operating Temperature	0 - 50 'C
Storage Temperuatre	0 - 50 'C
Signal Connector	(RGB, DVI)
Frame	Round Chassis
Touch Screen	PCAP - 10point
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	T.B.D
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	3.5 Kg
Packing Information	490x400x140(H)mm (1pcs/3.2kg)



Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Panel Mount
Touch Screen	-


< Option >

Touch Screen Dimming Auto, Knob, Manual temperature control Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor: 50% Dimming (5%, Zero Dimming: please ask to Sales team)

Round Multi Touch Monitor

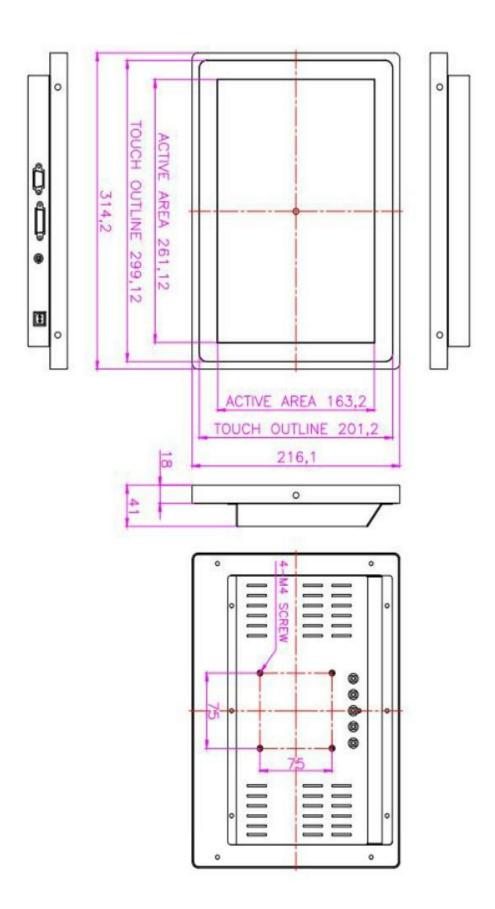

^{*} Specifications are subject to change without notice.