TSPC-0702LE-PCT 7" PCAP All-in-One Touch Computor



TSPC-0702LE-PCT 7inch projective capacitive All-In-One touch computor Aluminum alloy front bezel, inside pcap touch meet IP65 water proof, Highlight display with anti -vandal tempered cover glass meet UL60950, Suitable for outdoor application, which is designed for Kiosks, Interacive digital signage, ATM, Gaming, Casino, Industrial, Education etc., is easily connected and installed by user

Features


Zero-Bezel flat touch computor, slim housing.

3mm anti-vandal tempered cover class, Meet IP65 water proof Standard VESA mounting and for side bracket options

Specification

Specification		
DISPLAY	LCD Size(Resolution)	7" 16:9 Active Matrix TFT LCD
	Display Area (mm)	85.5 (H) x 154.7 (V)
	Viewin Angle	Horizontal : 75' or 150' total, Vertical: 75" or 150' total
	Brightness(cd/m2)	500 (typ.)
	Contrast	800 : 1 (typ.)
	Aspect Ratio	16:9
	Touch Screen	PCAP(Resistive , IR touch Option)
Hardware	CPU	Intel® Celeron J1900/1.99GHz
	RAM	DDR3 4G or 8G
	Harddisk	64G/128G/256G SSD
	USB and Comport	2x USB 3.0, 2X USB2.0
	Ethernet Port	1xLAN RJ45(Gigabit)
	Additional Video Out	1x HDMI and 1xVGA out
	Wireless	Wi-Fi 802.11 a/b/g/n/ac
	Bluetooth	Bluetooth 4.0
	Audio and Microphone	1x 3.5mm line out, and 1xmicrophone out
	Speaker	2x12W internal speakers
	Support OS	Windows 7 / Windows 8 / Windows 10 / Linux.
	Touch Screen	
	Touch Technology	Projective Capacitive Touch Technology
	Response time	3ms
	Touch Resolution	32767x32767
	Touch Glass	3mm Anti-vandal Tempered glass meet UL60950 IK07
	Sealability	Touchscreen sealed to Aluminum alloy -bezel IP65
		Touchscreen seal to LCD
	MTBF	50,000 hours demonstrated
	Mounting Options	VESA Mount, four-side bracket and stand option
	Power Supply	100-240VAC, 50~60Hz
	Temperature Range	operating Temperature : 0°C ~ 50°C, storage: -20 to 60'c
	Humidity Range	operatig 20%~80%, Storage: 10% to 90%
	Power Consumption	TDP
	Dimension	TBD
	Weight	TBD
	-	•

Mechnical Drawing

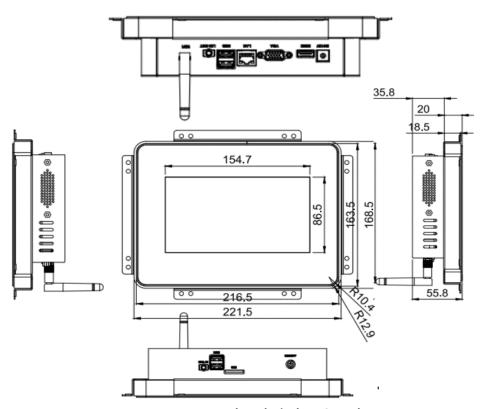

Touch and Displays Co.,Ltd.